

TRB – Bluetooth Recording Device User Guide



Got Questions? Email us at info@killermobile.com or visit <http://www.killermobile.com/applications/killer-merchandise/trb-mobile-call-recording-device.html>

CAUTION!

The use of monitoring, recording, or listening devices to eavesdrop, monitor, retrieve, or record telephone conversation or other sound activities, whether or not contemporaneous with transmission, may be illegal in certain circumstances under federal or state laws. Legal advice should be sought prior to implementing any practice that monitors or records any telephone conversation.

PC Compatibility

The Xtension Recorder desktop application software supplied will work on recent Microsoft operating systems including Windows

XP, Vista and 7. Mac OS X 10.5 and later are supported on Intel Macs (see the Xtr TRB BT Recording Device Mac Software User Guide).

Note: Windows 95, 98, NT ~~and Macintosh~~ are not supported.

CHECK THE PACKAGE CONTENTS

- 1 x TRB BT Recording Device unit
- 1 x USB style Power supply unit
- 1 x Mini USB Cable
- 1 x Headset with answer switch
- 1 x Quick Start Guide

Other manuals and software are supplied in the TRB BT Recording Device memory.

Check the contents of your package and inform us immediately if any items are missing at info@killermobile.com

Quick Setup Instructions

1. Remove the TRB BT Recording Device, Power supply, and USB lead from the packaging.
2. Fully charge your TRB BT Recording Device. You can do this by connecting the mini USB lead into the TRB BT Recording Device and the power adaptor or by connecting TRB BT Recording Device to the USB port of any PC.
3. TRB BT Recording Device will take approximately 5 hours to fully charge.

4. Turn on the TRB BT Recording Device using the Power/End Call key.

TRB BT RECORDING DEVICE KEYS


To turn TRB BT Recording Device on/off simply press and hold the 'End' key for a few seconds.

If TRB BT Recording Device is on, the LCD may go blank to save power, simply press the Record key to restore the display.

The Menu Navigation key can be used to enter the menus. You can scroll between menu entries using the Up/Down Menu Navigation keys. Alternatively you can go straight to a menu entry by pressing the associated key on the keypad.

Normally the right Menu Navigation key can be used to go back to the previous menu. The End key exits the menus and returns to the main screen.

NOTE: The TRB BT Recording Device can be reset by pressing and holding the End key and the * key (bottom left) together for approximately 10 seconds.

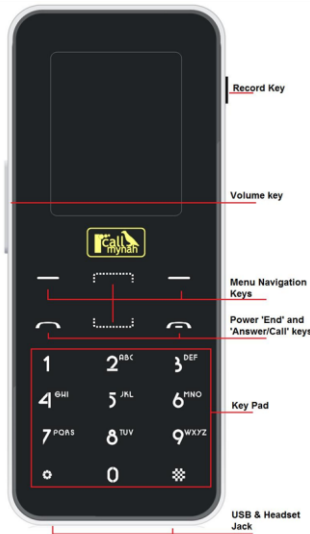

SET THE DATE AND TIME

1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '3 Settings'.
3. Select '5 Date & Time'



4. Select '1' to set the Date. Use the Up/Down navigation keys and 'Next' to set.
5. Press 'OK' when the Date is set and follow the same procedure to set the Time.
6. After setting the Time you can also change the date format to match your location if required. The default format is 'DD/MM/YY'.
7. Press the 'Back' key to display the main screen and to confirm the Date and Time are correct.




SET SECURITY AND OTHER PARAMETERS

TRB BT Recording Device has the following important security features:


- Key Pad lock to stop unauthorized access (after an idle timeout).
- Password protected USB access to stop unauthorized access to your recordings from a PC

To set the security you desire:


1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '3 Settings'.
3. Select '6 Security'.



4. Enter the password (default '0000').
5. Select '1 Key Lock' to toggle Key Lock on/off.
6. Select '2 USB Lock' to toggle USB Lock on/off.



7. Select '3 Key Code' to enter a password to unlock the device and allow access to the security menu.
8. Press Back to go to the previous menu and select '7 System'.
9. Select '4 AutoLock' and select a timeout for the Key Lock and USB Lock.




Connect To Your Mobile

TRB BT Recording Device uses Bluetooth to connect to and record your mobile phone calls.

You will need to use the functions of your mobile phone as well.


To allow your mobile phone to search and find TRB BT Recording Device:

1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '4 Bluetooth'.
3. Make sure item '3 Discover' is on.
4. You may wish to change the default Bluetooth PIN as well. The default is: '0000'.



You can also change the name of your TRB BT Recording Device device if you wish; this is the name which will be shown on your mobile phone. The default name is 'TRB BT Recording Device':


1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '3 Settings'.
3. Select '7 System'.
4. Select '1 Name'.
5. Use the 'Delete' menu navigation key to delete the existing name.
6. Use the Keypad keys to enter the new name in the same way you would a text message on your mobile phone

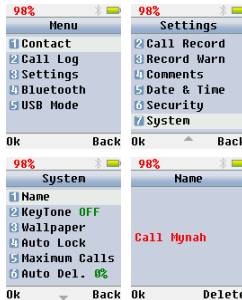


With Bluetooth discover on and the PIN set, you can now set your mobile phone to discover and connect to TRB BT Recording Device. You will need to consult your mobile phone user guide on how to discover and connect to Bluetooth devices.

Once your mobile has found the TRB BT Recording Device, you will need to enter your chosen password to connect. Once you are connected, the Bluetooth logo on the TRB BT Recording Device screen will turn from Grey to Blue.

Not connected to mobile phone:




Connected to mobile phone:



NOTE: If at a later date you need to pair a different TRB BT Recording Device with your phone please note the following. On some mobile phones once you have paired a TRB BT Recording Device with the phone, you must delete the TRB BT Recording Device device from the phone before you can pair another. Disconnecting the TRB BT Recording Device is not enough.


TRB BT Recording Device Main Screen

The main TRB BT Recording Device screen shows various status icons.

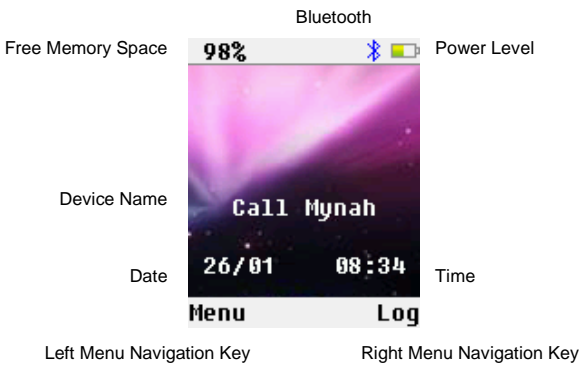


BLUETOOTH INDICATOR

The Bluetooth connection indicator lights in blue when you are connected to your Bluetooth mobile phone. Otherwise it is grey.



POWER LEVEL INDICATOR

The power level indicator shows the percentage of battery charge remaining. The power level shows a red flash when charging over USB from a PC or using the USB mains charger. A full charge takes approximately 5 hours.



When the power level drops low the TRB BT Recording Device will show a low power warning screen and beep. If not connected to a charger it will then power off after 30 seconds.


In normal usage the TRB BT Recording Device will turn off its display to save power after 1 minute. Press the record key to turn the display back on.

WALLPAPER


The background wallpaper on the main screen can be changed or customized.

The wallpaper is set as follows:

1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '3 Settings'.
3. Select '7 System'.




4. Select '3 Wallpaper'
5. Use the Up/Down navigation keys to select one of 4 wall papers.
6. Press 'OK' to confirm.



NOTE: You can change the wallpaper bitmaps in the TRB BT Recording Device memory. The default wall paper is located at the root of the TRB BT Recording Device memory and is called wallpaper.bmp. Wallpapers 1-3 are located in the wallpaper folder and are called 1.bmp, 2.bmp and 3.bmp. These bitmaps should be 128x128 pixels and 24 bit colour.


FREE MEMORY SPACE

This displays the percentage of **FREE** memory available for storing calls. When the percentage of free memory falls below a threshold TRB BT Recording Device can automatically delete old calls to make room for new ones. Calls which have been marked as important are never deleted.



The threshold for deleting old calls is set as follows:

1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '3 Settings'.
3. Select '7 System'.
4. Press '6' Auto Del.'.
5. Use the Up/Down navigation keys to change the percentage of **USED** memory at which to delete old unimportant calls.
6. Press OK to save the changes.

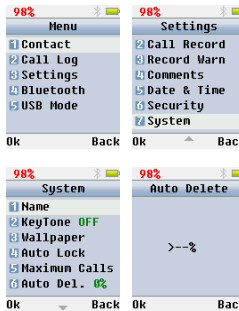

Formatted: Normal

MAXIMUM CALL LIMIT

Old calls are deleted once the number of calls on the TRB BT Recording Device reaches the Maximum Calls limit. The limit defaults to 3000 calls and only unimportant calls will be deleted. The absolute limit on the number of calls is 10000. To change the Maximum Calls limit:

1. Press 'Menu' on the navigation keys to show the main menu.


2. Select '3 Settings'.

3. Select '7 System'.

4. Select '5 Maximum Calls'.

5. Use the Up/Down navigation keys to change the limit.

6. Press OK to save the changes.

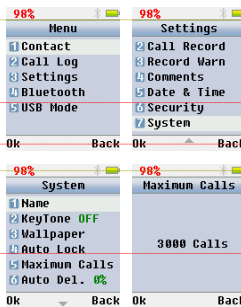

Formatted: Normal

Formatted: Font: (Default) Arial, 10 pt

Formatted: Font: (Default) Arial, 10 pt

Formatted: Indent: Left: 0.5", No bullets or numbering

Formatted: Indent: Left: 0.28", No bullets or numbering

Formatted: Font: (Default) Arial, 10 pt

Formatted: Indent: Left: 0.5", No bullets or numbering

Formatted: Font: (Default) Arial, 10 pt

Formatted: Indent: Left: 0.28", No bullets or numbering

Formatted: Font: (Default) Arial, 10 pt

Formatted: Indent: Left: 0.5", No bullets or numbering


Formatted: Font: (Default) Arial, 10 pt

Formatted: Normal


MARKING CALLS AS IMPORTANT

Calls can be marked important so they are never auto deleted as follows:

1. Press 'Log' to access the call log screen.
2. Select '1 Call Log'.
3. Use the Up/Down navigation keys to select the call you wish to protect.



4. Press 'Opt.'
5. Select '5 Set Important' to mark the call as important.
6. Press 'Back' to return to the Call Log. The call is now marked with a ! to show it is important.



7. Press the 'End' key to return to the main screen.


To mark an important call as unimportant follow the same procedure, but select '6 Del Important'.

Making & Recording Calls

TRB BT Recording Device is initially set to record all incoming and outgoing calls. Normally you should use your TRB BT Recording Device to make and receive calls rather than your mobile phone. This will ensure all calls are recorded.

When an incoming call is detected TRB BT Recording Device displays the following screen:

Use either the Answer key or the 'Answer' navigation key to accept the call. Press the End key or the 'Reject' navigation key to reject the call. The call will automatically be recorded.



NOTE. If you make or receive a call using your mobile phone instead, TRB BT Recording Device will see the call and display the 'Talking' screen. You must transfer the call to the TRB BT Recording Device [using your phone's Bluetooth options.](#)


Press the Record button or the 'Record' navigation key to record the call; otherwise it **WILL NOT BE RECORDED.**



Once the call is being recorded the following screen will show the length of the recording as the call progresses:



Making outgoing calls using your Cal Mynah is the same as from your mobile phone. Dial the number, and press the Call key or the 'Call' menu navigation key.



NOTE: You can also use the answer button on the supplied headset to answer calls and start recording.

CALL MUTING AND RECORDING OPTIONS

During a call it is possible to mute the conversation for privacy. You can also mark calls as important, and add comments. This can also be done after the fact if more convenient.


You can mute the call as follows:

1. Press 'Menu' on the navigation keys to show the menu.

2. Press 'Mute' to mute the conversation.

3. To restore the conversation press 'Unmute'.

To mark a call as important select '3 Set Important'. To add a comment select '4 Add Comment'.



Formatted: Font: (Default) Arial, 10 pt

Formatted: Indent: Left: 0.25", No bullets or numbering

Formatted: Font: (Default) Arial, 10 pt

Formatted: Indent: Left: 0.25", No bullets or numbering

Formatted: Font: (Default) Arial, 10 pt

Formatted: Normal, No bullets or numbering

Formatted: Font: (Default) Arial, 10 pt

Formatted: Normal, No bullets or numbering

Formatted: Font: (Default) Arial, 10 pt


CONTACT LIST

Instead of dialing the number every time you can set up a contact list of up to 50 numbers. Contacts have many advantages:

- The contact name is stored in the recorded file as well as the number.
- You can set specific recording options on a per contact basis (Always Record, Never Record).
- You can quick dial contacts by adding them to a favorites list.
- You can search for contacts by name or number.

You can add a new contact as follows:

1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '1 Contact'.
3. Select '2 New' and enter the Contact Name using the keypad.
4. Select 'Num.1' and enter the Primary/Work number.
5. Select 'Num.2' and enter the Mobile number (may be left blank).
6. Select 'Num.3' and enter the Home number (may be left blank)
7. Select 'Save'.

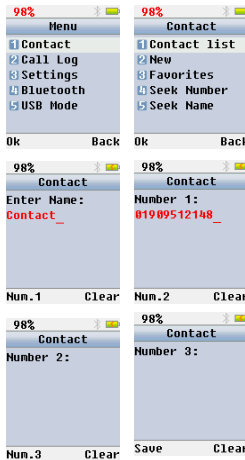

Formatted: Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 1 + Indent at: 0.25"

Formatted: Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"


Formatted: Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: Numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Indent at: 0.25"


NOTE: You can also add a contact using a recorded call.

Once a contact has been set up you can set the recording option to use for the contact:


1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '1 Contact'.
3. Select '1 Contact List'.



4. Use the Up/Down navigation keys to select the contact you wish to change.
5. Press 'Options'.
6. Select '5 Always Record', '6 Never record', or '7 Normal Record'.



NOTE: It is possible to enter contacts using your PC and the XtrCallMynah software. This is much faster if you have a few to enter.

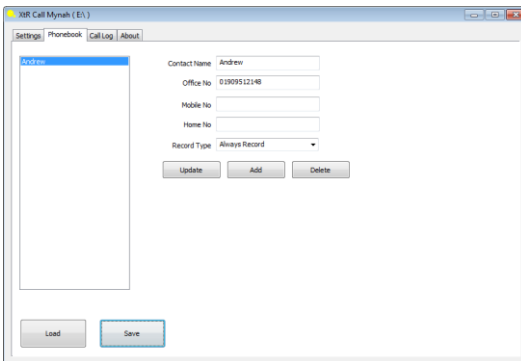


FAVORITES


Once contacts have been entered it is possible to set some of them up as favorites. Favorites are 9 numbers which you can quick dial using the number keys (1-9). Just hold down the appropriate number for a few seconds and the number for the contact will be dialed.

To add a contact to your favorites:


1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '1 Contact'.
3. Select '3 Favorites'.



4. Use the Up/Down navigation keys to select the number to hold the contact.
5. Press 'Options' and select '2 Edit'.



6. Use the Up/Down navigation keys to select the contact.
7. Press 'Select'.
8. Use the Up/Down navigation keys to select the number if there is more than one.
9. Press 'Select' again to confirm.





INCOMING CALL NOTIFICATION

TRB BT Recording Device can play a tone, flash the screen or vibrate when an incoming call arrives (or any combination of the three).

To set the Incoming Call notification:

1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '3 Settings'.
3. Select '1 Incoming Call'.
4. Select '1 LCD Flash', '2 Vibrate', or '3 Tone' to alter the options for each respectively.




CALL RECORDING OPTIONS


TRB BT Recording Device records all calls by default. It is possible to alter the default so you are prompted each time, or calls are only recorded manually.

To set the Call Recording method:

1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '3 Settings'.
3. Select '2 Call Record'.



4. Select '1'.
5. Select '1 Record All', '2 Manual Record' or '3 Prompt Each'.




Formatted: Font: (Default) Arial, 10 pt

NOTE: In 'Manual Record' mode, you must press the Record Key or the 'Record' navigation key to begin recording. In 'Prompt Each' mode, there will be a countdown prompt asking you if you wish to record the call.

NOTE: In 'Manual Record' and 'Prompt Each' mode, **ALL** of the call will be recorded regardless of when you start the recording.

You can set the countdown time for 'Prompt Each' mode as follows:

1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '3 Settings'.
3. Select '2 Call Record'.
4. Select '2 Countdown'.
5. Use the Up/Down navigation keys to select the countdown required and press OK.



Formatted: Font: (Default) Arial, 10 pt

CALL QUALITY OPTIONS

TRB BT Recording Device records using a high level of compression to maximize the number of calls which can be recorded. It is possible to alter the default so you can record fewer calls but at higher quality.

To set the Call Quality:


1. Press 'Menu' on the navigation keys to show the main menu.

2. Select '3 Settings'.

3. Select '2 Call Record'.

4. Select '5 Quality'.

5. Select '1 Low, '2 Medium' or '3 High'.

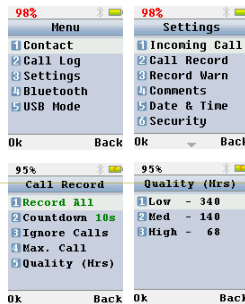

NOTE: The default call quality is Low (GSM 6.10 compression) and can store up to 340 hours of calls on the TRB BT Recording Device. Medium quality (ADPCM compression) can store up to 140 hours of calls on the TRB BT Recording Device. High quality (G.711 compression) can store up to 68 hours of calls on the TRB BT Recording Device.

All three compression methods can be played and exported to WAV using the supplied XtrDesktop software.

Formatted: Font: (Default) Arial, 10 pt

Formatted: Numbered + Level: 1 +
Numbering Style: 1, 2, 3, ... + Start at: 1 +
Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: Numbered + Level: 1 +
Numbering Style: 1, 2, 3, ... + Start at: 1 +
Alignment: Left + Aligned at: 0" + Indent at: 0.25"

Formatted: Font: (Default) Arial, 10 pt

Formatted: Numbered + Level: 1 +
Numbering Style: 1, 2, 3, ... + Start at: 1 +
Alignment: Left + Aligned at: 0" + Indent at: 0.25"


Formatted: Numbered + Level: 1 +
Numbering Style: 1, 2, 3, ... + Start at: 1 +
Alignment: Left + Aligned at: 0" + Indent at: 0.25"

LIMITING CALL RECORDING BY DURATION

TRB BT Recording Device records all calls by default. It is possible to limit recording based on the duration of the call. Very short calls can have their recording removed if their length is below a threshold. Very long calls can have their recording stopped after a certain length.

To Ignore Calls below a certain length:


1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '3 Settings'.
3. Select '2 Call Record'.
4. Select '3 Ignore Calls'.

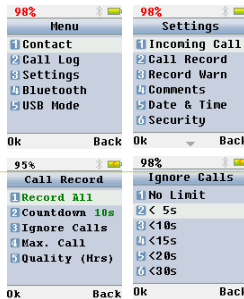

5. Use the Up/Down navigation keys to select the minimum call duration.

To stop recording a call after a certain length:

1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '3 Settings'.
3. Select '2 Call Record'.
4. Select '4 Max. Call'.
5. Use the Up/Down navigation keys to select the countdown required and press OK.



Formatted: Font: (Default) Arial, 10 pt


Formatted: Font: (Default) Arial, 10 pt

GIVING REMOTE PARTIES A RECORD WARNING

TRB BT Recording Device does not warn remote parties the call is being recorded by default. It may be a requirement in your locality to give such a warning, or you may wish to. Two types of warning are possible, a recurring beep tone during the call, or an audio announcement at the start of the call.

To set the Record Warning method:

1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '3 Settings'.
3. Select '3 Record Warn'.

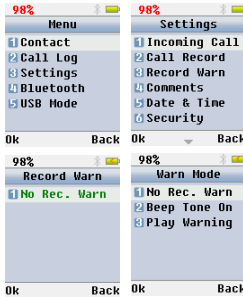

4. Select '1'.
5. Use the Up/Down navigation keys to select the warning method.


NOTE: When TRB BT Recording Device is set to 'Play Warning' mode it plays the contents of the 'announcement.wav' file located at the root of the TRB BT Recording Device memory. You can replace this file with a WAV file of your own, provided it has the same name and same type (8 KHz or 64 Kbps, mono PCM).

MEMO RECORDING

As well as recording Calls, TRB BT Recording Device may be used to record memos or dictation.

Simply hold down the Record Key for a few seconds and the Memo screen will be displayed along with the recording duration. Press the End key to end the memo recording.

Memos do not have caller id associated with them, and are displayed with a different icon to calls.

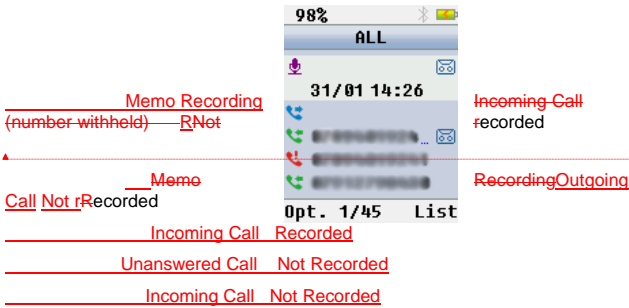

Formatted: Left

Formatted: Font: 8 pt

Listening To Recordings


TRB BT Recording Device will save the date, time, duration, caller id and other parameters with each call. TRB BT Recording Device also logs calls as well as recording them.

NOTE: The Call Log may contain entries for calls which were not recorded. If you try to play these calls, you will see the message 'No Data'. Recorded calls are shown with a 'tape' icon on the right.


You can avoid this by filtering your Call Log to show only recorded calls/memos. See below.

To play your recordings:

1. Press 'Log' on the navigation keys to show the Log menu.
2. Press '1 Call Log'.
3. Use the Up/Down navigation keys to select a call or memo.




4. Select 'Opt' and then '2 Play Record'; or press the 1 Key to play the recording.
5. Press the 'Pause' navigation key to pause the recording.
6. Press the 'Play' navigation key (or 1 Key) to resume playback.
7. Press 4 or 6 the Up/Down navigation keys to Rewind or to Fast Forward/Rewind during playback.
8. Press the 'Speaker' navigation key to toggle between the Handset and Speaker playback.
9. After the recording has finished playing or while paused press the 'Back' navigation key to return to the Call Log.
10. Press the End key to exit the Call Log.




LISTENING TO RECORDINGS ON YOUR PC

TRB BT Recording Device records files in its own XTR audio format in the TRB BT Recording Device memory. These files can also be played back from your PC, or transferred to the PC for later playback. They can also be converted to Windows WAV files if required.

Use the XtR CallMynah software to transfer files to your PC. You can copy a selection of recordings or all recordings. XtR TRB BT Recording Device can also play a call by launching the XtR Desktop call management software.

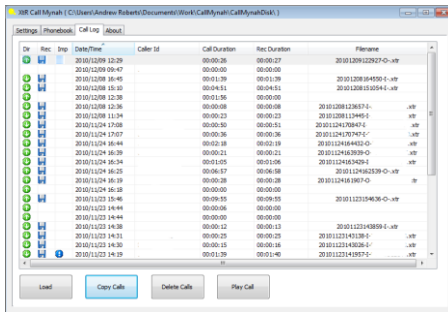

The XtR Desktop call management software allows management and playback of your calls, either in the TRB BT Recording Device memory, or on your PC.

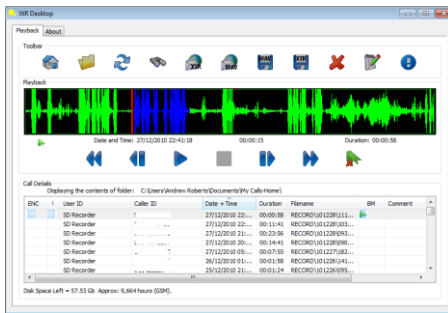

XtR Desktop allows calls to be exported or emailed as Windows WAV or XTR files.

Xtr CallMynah and XtR Desktop can be installed on your PC using the setup application located in the TRB BT Recording Device memory: \\Software\Setup_CallMynah.exe


See the 'XtR TRB BT Recording Device Software Users Guide' for more details of using both XtR CallMynah and XtR Desktop.

ADDING BOOKMARKS TO RECORDINGS

TRB BT Recording Device allows a portion of a call to be bookmarked, so that you can easily come back to it later. Once book marks are defined you can skip straight to that portion of a call when playing it back.

To define a bookmark:

1. Select 'Opt' and then '2 Play Record'; or press the 1 Key to play the recording.
2. When you reach the start of the area you wish to bookmark press 7. A marker shows the start of the bookmark.
3. When you reach the end of the area you wish to bookmark press 9. A marker shows the end of the bookmark.
4. Press the 4 key to jump to the start of the bookmarked area.
5. Press the 6 key to jump to the end of the bookmarked area.

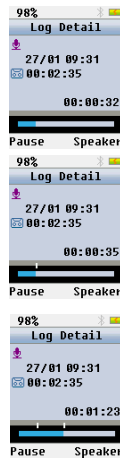

NOTE: You can remove an existing bookmark by pressing the 7 key, so there is a start to the bookmark but no end.-If you wish to then redefine a new bookmark press the 7 key again to set the new start position.

ADDING COMMENTS TO RECORDINGS


It is possible to add a predefined or custom comment to a recording.

To add a predefined comment:

1. Press 'Log' on the navigation keys to show the Log menu.

2. Press '1 Call Log'.


3. Use the Up/Down navigation keys to select a call or memo.



4. Select 'Opt' and then '3 Add Comment'.

5. Use the Up/Down navigation keys to select the comment you wish.

6. Press 'OK' on the navigation keys.




To add a custom comment:

1. Press 'Log' on the navigation keys to show the Log menu.

2. Press '1 Call Log'.


3. Use the Up/Down navigation keys to select a call or memo.



4. Select 'Opt' and then '4 ABC Comment'.

5. Enter the comment using the keypad.


6. Press 'OK' on the navigation keys.




MARKING CALLS AS IMPORTANT

Calls can be marked important so they are never auto deleted as follows:

1. Press 'Log' to access the call log screen.
2. Select '1 Call Log'.
3. Use the Up/Down navigation keys to select the call you wish to protect.



4. Press 'Opt.'
5. Select '5 Set Important' to mark the call as important.
6. Press 'Back' to return to the Call Log. The call is now marked with a ! to show it is important.




7. Press the 'End' key to return to the main screen.

To mark an important call as unimportant follow the same procedure, but select '6 Del Important'.


ADDING CALLS TO THE CONTACT LIST / PHONEBOOK

Recorded calls can be added to the contact list as follows:

1. Press 'Log' to access the call log screen.
2. Select '1 Call Log'.
3. Use the Up/Down navigation keys to select the call you wish to add to the contact list.



4. Press 'Opt.'
5. Select '7 Add to PhBook' and enter the Contact name.
6. Select 'Num.1', the caller id will be filled in if available.
7. Select 'Num.2' and enter a number if required.
8. Select 'Num.3' and enter a number if required.
9. Select 'Save'.





See the section *CONTACT LIST* for details of manually adding contacts.

DELETING CALLS AND CALL RECORDS

Recorded calls can be deleted provided they are not marked as important. To delete an important call first remove the important flag.

To delete a recording:

1. Press 'Log' to access the call log screen.
2. Select '1 Call Log'.
3. Use the Up/Down navigation keys to select the call you wish to delete.
4. Press 'Opt.'
5. Select '8 Delete Rec.'
6. Press 'Yes' to delete the recording.



NOTE: Deleting a recording in this way removes the recording but not the call log entry.

If you try to play the call again you will get a 'No Data' message.



To remove both the recording and the Call Log entry use option '9 Del.Log&Rec' instead of '8 Delete Rec.' above.

FILTERING CALL LOG ENTRIES

The Call Log displays all entries by default. This can include calls which were not recorded or calls where the recording has been deleted. It is possible to filter the Call Log to display a subset of the entries.

To filter the Call Log:

1. Press 'Log' to access the call log screen.
2. Select '1 Call Log'.
3. Press 'List' to open the List menu.
4. Use the Up/Down navigation keys to select the filter you wish to use.
5. Press 'OK' to apply the filter.



The filters are as follows:

ALL – display all entries, including both recorded and unrecorded Calls, and Memos.

Incoming – display only incoming calls (even if not recorded).

Answered – display answered calls only.

Unanswered – display unanswered calls only.

Outgoing – display only outgoing calls (even if not recorded).

Memo – display memo recordings only.

Important – display recordings marked important only.

Recorded – display recorded calls only.

Seek Number – display calls to/from a given number only.

Seek Comment – display calls containing a given comment only.

Seek Time – display calls from a specific date/time only.


Connecting To Your PC via USB

Connecting TRB BT Recording Device to your PC via USB will allow you to:

- Read the comprehensive user guides supplied.
- Install the supplied XtR Desktop software (to manage calls on your PC).
- Install the supplied XtR CallMynah software to copy calls to your PC, and manage Contacts and device settings.
- Access the TRB BT Recording Device memory (for example to upgrade the firmware or to change recorded announcements).


To connect TRB BT Recording Device to your PC, simply connect the mini USB cable between your PC and TRB BT Recording Device, then:

1. Press 'Menu' on the navigation keys to show the main menu.
2. Select '5 USB Mode'.

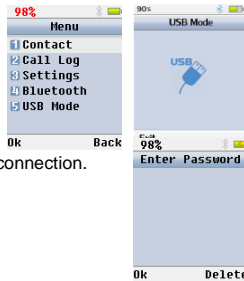

3. If prompted, enter your password to allow the connection.

The files in the TRB BT Recording Device memory are as follows:

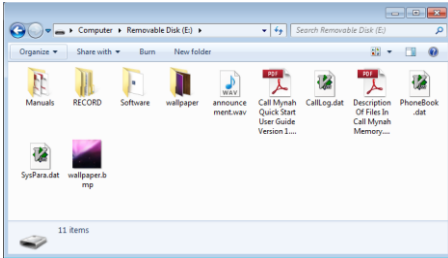

Manuals – PDF manuals for the device.

\RECORD – Recordings in XTR format.

\Software – Installation program for PC software.

\wallpaper – Wallpaper bitmaps.

\announcement.wav – Recorded call announcement.

\wallpaper.bmp – Default wallpaper.

\TRB BT Recording Device Quick Start User Guide.pdf – Quick Start Guide.

\Description Of Files In TRB BT Recording Device Memory.pdf – Description of these files.

\CallLog.dat – System file do not delete or modify.

\PhoneBook.dat – System file do not delete or modify.

\SysPara.dat – System file do not delete or modify.

NOTE: The contents of the CallLog.dat, PhoneBook.dat, SysPara.dat files can be inspected and modified using the XtR CallMynah software. See the 'XtR TRB BT Recording Device Software User Guide' for details.